

附件及週邊設備

Attachment of Electric Screwdriver

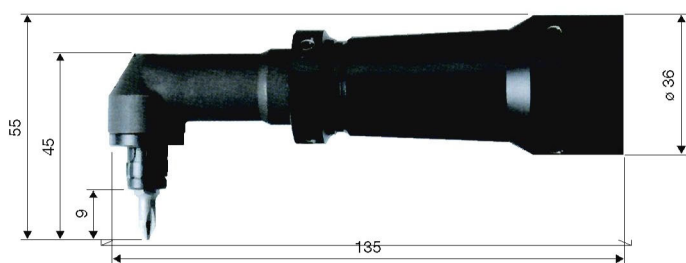
二合一專利型扭力控制器+幫浦
2 in 1 patented torque controller plus pump
 (適用於氣吸式機型 Suitable for sucking electric screwdrivers)



槍型握把
Pistol grip
(適用於所有下壓式電氣動起子 Suitable for push to start electric screwdrivers)



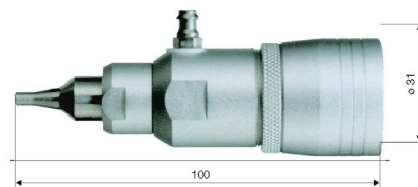
超迷你彎 90° 轉接頭
Minin type 90° bending coupler
 (適用於所有槓桿式電氣動起子 Suitable for all lever start pneumatic screwdrivers)



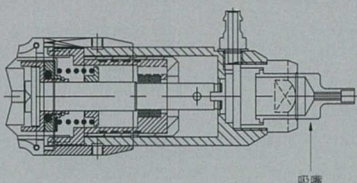

多功能螺絲專利整理盒
Patented multifunction screw kit box
 (一台適用 1 set available 1.0, 1.2, 1.4, 1.6, 2.0, 2.4 螺絲 screwdrivers)









真空吸著式氣吸頭
Sucker
 (適用於氣吸式電動起子 Suitable for vacuum pick up electric screwdrivers)













氣吸式電動起子吸嘴規格表 Sucker specification for the sucking electric screwdriver

機種名 Model No.	φ d1	φ d2	φ D	H	品樣 Dimension(mm) 尖端r×直徑D×長度L	尺寸圖 Dimension
4M7011	1.6	1.8	2.8	1	00 ×1.5 ×46	
4M7012	1.6	2.0	3.0	1	00 ×1.5 ×46	
4M7013	1.6	2.2	3.2	1	00 ×1.5 ×46	
4M7014	1.6	2.5	3.5	1	00 ×1.5 ×46	
4M7015	2.1	2.7	3.7	1	0 ×2.0 ×46	
4M7016	2.1	3.0	4.0	1	0 ×2.0 ×46	
4M7017	2.1	3.2	4.2	1.5	0 ×2.0 ×46	
4M7018	2.1	3.4	4.4	1.5	0 ×2.0 ×46	
4M7019	2.1	3.6	4.6	1.5	0 ×2.0 ×46	
4M7010	2.1	3.8	4.8	1.5	0 ×2.0 ×46	
4M8011	2.6	4.2	5.2	1.5	1 ×2.5 ×46	
4M8012	2.6	4.5	5.5	2	1 ×2.5 ×46	
4M8013	2.6	5.4	6.4	2	1 ×2.5 ×46	
4M8017	3.8	5.4	6.4	2	T8 ×3.0 ×50	
4M8018	3.6	4.2	5.2	2	T7 ×3.0 ×60	
4M8019	3.8	4.5	5.5	3	1 ×3.0 ×60	
4M8010	4.8	5.4	6.4	2	T8 ×3.0 ×60	

電動起子頭規格 Electric bit specification

外型 Bit Shape	起子頭直徑 Bit Shank (mm)	頭型 Head	尺寸 Size (mm) 尖端T x 直徑D x 長度L			適用螺絲 Available Screw
	ø4	十字咀 Philips	00	x2.0	x40	M0.8~M1.2
			0	x2.5	x40	M1.2~M1.7
			1	x3.0	x40	M2.0~M2.6
			1	x4.0	x40	M2.0~M2.6
			2	x4.0	x40	M3.0~M5.0
	ø5	十字咀 Philips	00	x2.0	x60	M0.8~M1.2
			0	x2.5	x60	M1.2~M1.7
			1	x3.0	x60	M2.0~M2.6
			1	x5.0	x60	M2.0~M2.6
			2	x5.0	x60	M3.0~M5.0
	ø4	一字咀 (刃厚mm) Slotted (edge of thickness)	0.3	x1.7	x40	M1.2~M1.8
			0.4	x2.0	x40	M2.0~M2.2
			0.4	x2.5	x40	M2.0~M2.2
			0.4	x3.0	x40	M2.0~M2.2
			0.6	x4.0	x40	M2.2~M2.6
	ø5	一字咀 (刃厚mm) Slotted (edge of thickness)	0.4	x3.0	x60	M2.0~M2.2
			0.6	x4.0	x60	M2.2~M3.0
			0.7	x5.0	x60	M3.5
			1.0	x7.0	x60	M3.8~M4.0
	ø4	六角螺母邊距 Distance between side to side of hex bit holder	2.3		x40	絲母用
			2.5		x40	絲母用
			3.0		x40	M1.6
			4.0		x60	M2
			4.5		x60	M2.3
			5.0		x60	M2.5
			5.5		x60	M3
			6.0		x60	M3.5
			7.0		x60	M4
			8.0		x60	M5
	ø5	六角螺母邊距 Distance between side to side of hex bit holder	9.0		x60	M5.5
			10.0		x60	M6
			4.0		x60	M2
			4.5		x60	M2.3
			5.0		x60	M2.5
			5.5		x60	M3
			6.0		x60	M3.5
			6.35		x60	非標螺絲
			7.0		x80	M4
			8.0		x80	M5
			9.0		x80	M5.5
			10.0		x80	M6
			11.0		x80	M7
			12.0		x80	非標螺絲
			13.0		x80	M8
			14.0		x80	M8
			17.0		x80	M10

電動起子頭規格 Electric bit specification

外型 Bit Shape	起子頭直徑 Bit Shank (mm)	頭型 Head	尺寸 Size (mm) 尖端T x 直徑D x 長度L			適用螺絲 Available Screw
 	六角對邊 Hex shank 6.35	十字咀 Philips	1	x6.35	x65	M2.0~3.0
			1	x6.35	x100	M2.0~3.0
			2	x6.35	x65	M3.0~5.0
			2	x6.35	x100	M3.0~5.0
 	六角對邊 Hex shank 6.35	十字咀 Philips	1	x4.5	x65	M2.0~3.0
			2	x4.5	x65	M3.0~5.0
			2	x4.5	x100	M3.0~5.0
			2	x4.5	x150	M3.0~5.0
			2	x4.5	x82	M3.0~5.0
 	六角對邊 Hex shank 6.35	一字咀 (刃厚mm) Slotted (edge of thickness)	3	x4.5	x82	M6.0~8.0
			0.8	x6	x45	M3.5
			0.8	x6	x70	M3.5
			1.0	x8	x45	M3.8~M4
			1.0	x8	x70	M3.8~M4
 	六角對邊 Hex shank 6.35	六角穴 Hexagonal Socket Head	1.2	x10	x52	M4
			1.2	x10	x70	M4
			2.0		x65	M3
			2.5		x65	M4
			3.0		x65	M5
			4.0		x65	M6
			5.0		x65	M8
			6.0		x65	M10
			2.0		x110	M3
			2.5		x110	M4
			3.0		x110	M5
			4.0		x110	M6
 	六角對邊 Hex shank 6.35	梅花咀 Torx Head	5.0		x110	M8
			6.0		x110	M10
			T6	x4.5	x65	M1.8~M2
			T8	x4.5	x65	M2.5
			T10	x4.5	x65	M3
			T15	x4.5	x65	M3.5
			T20	x5.0	x65	M4
			T25	x5.0	x65	M5
			T30	x6.0	x65	M6
			T40	x6.0	x40	M8

