



VACUUM CLEANING ATTACHMENTS FOR
CLEAN WORKING ENVIRONMENT

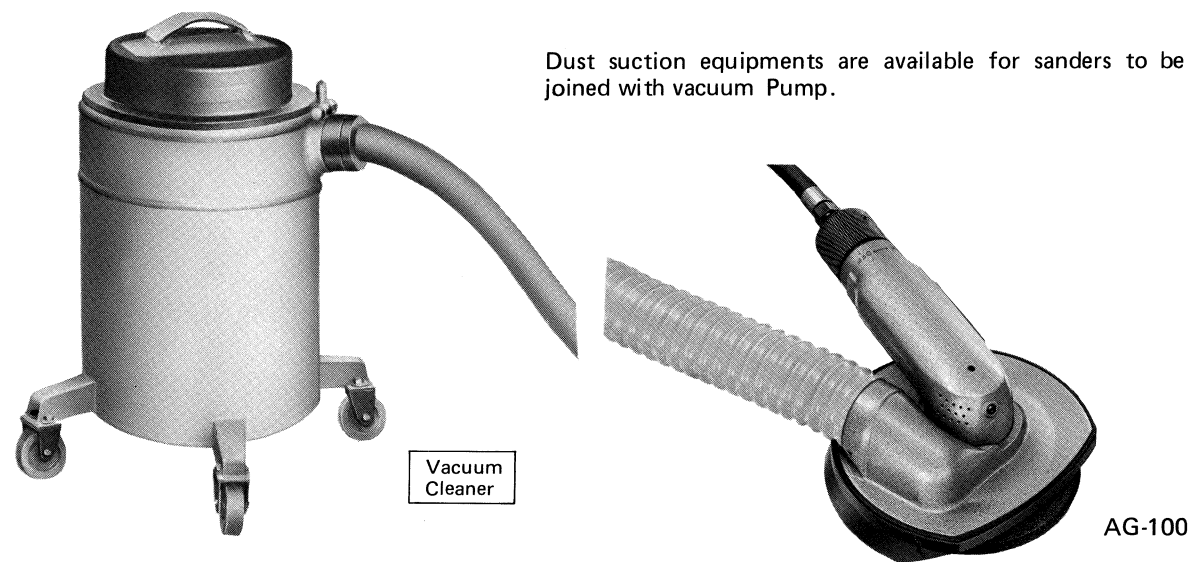


Dust suction equipments are available for sanders to be joined with vacuum Pump.

*Two sizes (32mm dia. and 38mm dia.) of Hose Connectors are available for Dust Suction Assembly.


DUST SUCTION ATTACHMENTS
FOR SANDERS

Dust Suction Assembly	Model	Assembly Code No.
	AG-100 Series	539-746-0 (32 mm)
		539-746-2 (38 mm)

Rubber Pads

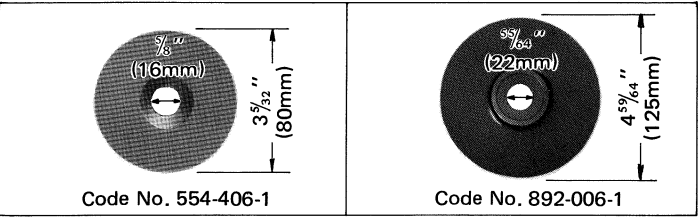

Mounting Adapters (Any other types of adapters to meet your local safety regulations can be designed at your request). Same adapters can be applied to both depressed center wheels for grinding and rubber pads for sanding.

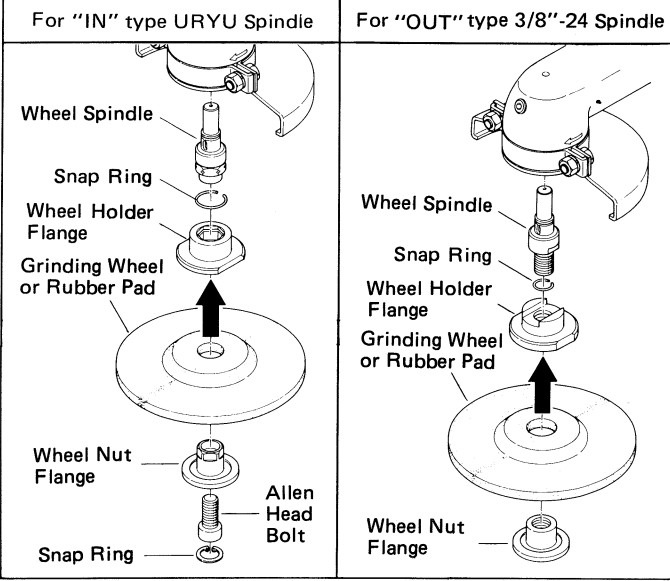

IMPORTANT!!

- ★ **Air Pressure:**— 85 psi (0.6MPa) Air Pressure is recommended for the most efficient performance. Too high air pressure will cause damage.
- ★ **Lubrication:**— For Air Motor — Supply Turbine Oil properly before and after operation. (For example MOBIL TURBINE OIL #32, SHELL TURBINE OIL #32, and or equivalent.)
- ★ **For Bearings** — Supply recommended high quality Grease properly (for examples, SHELL ALVANIA NO.2, MOBILPLEX 2, or equivalents) once every three months and when the tool is overhauled. Over-greasing will cause dull motion or heating.
- ★ **Dry & Clean Air:**— Drain daily, and install filter at or near the take-off point to prevent trouble from foreign matter.
- ★ **Air Hose & Joints:**— Use Air Hose (the shorter, the better), Joints and other fittings of good condition and of proper size to avoid pressure drop.
- ★ **Regular Overhaul:**— At least once every three months regular or periodical overhaul by a competent person is needed for best performance and trouble-less operation.
- ★ **Genuine Parts:**— Use only URYU's genuine spare parts for replacement.

Distributed by:

Printed in Japan

URYU SEISAKU, LTD.

Claims must be filed only with distributors within ten (10) days from delivery.

UPT (URYU Pneumatic Tools)

2"(50mm), 4"(100mm) & 5"(125mm) Angle Grinders
(Governed & Non-governed)

These 4" handy angle grinders are ideally suited for close-quarter work with less operator's fatigue. Both AG-100 and USG-4 series tools are available with two different throttle handles. The self-closing lever throttle handle for intermittent operation and the sleeve type throttle handle for continuous operation. The governed models are recommended for heavy-duty production grinding.

GREASE PLUG

LIGHT TYPE


MODEL
AG-100SL
13,600 r. p. m.
governed

RESINOID GRINDING WHEEL

GREASE PLUG

HEAVY-DUTY TYPE

MODEL
USG-4S
13,600 r. p. m.
governed

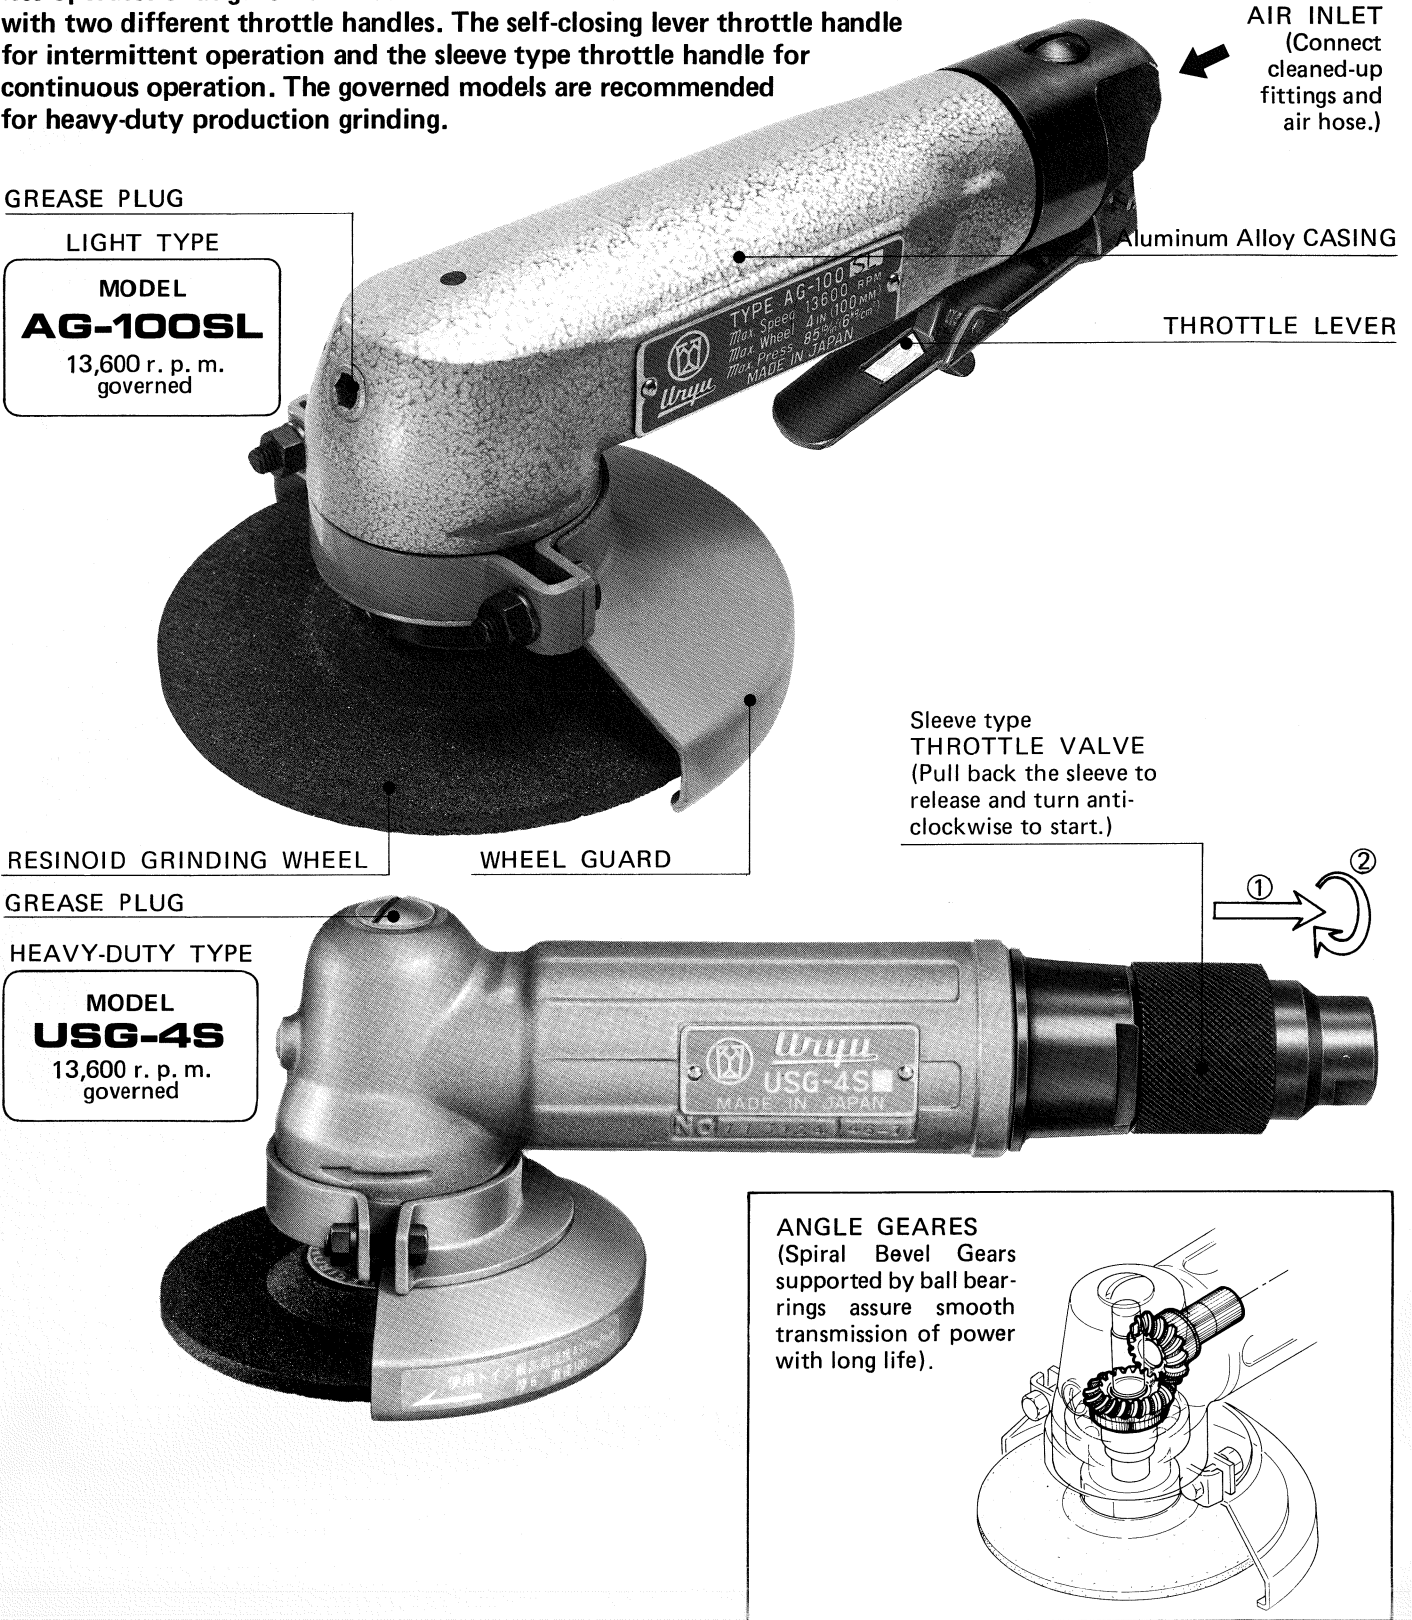

URYU SEISAKU, LTD.
Osaka, Japan

OKA-198-05-10-05-2018