



URYU UVG-SERIES VERTICAL GRINDERS

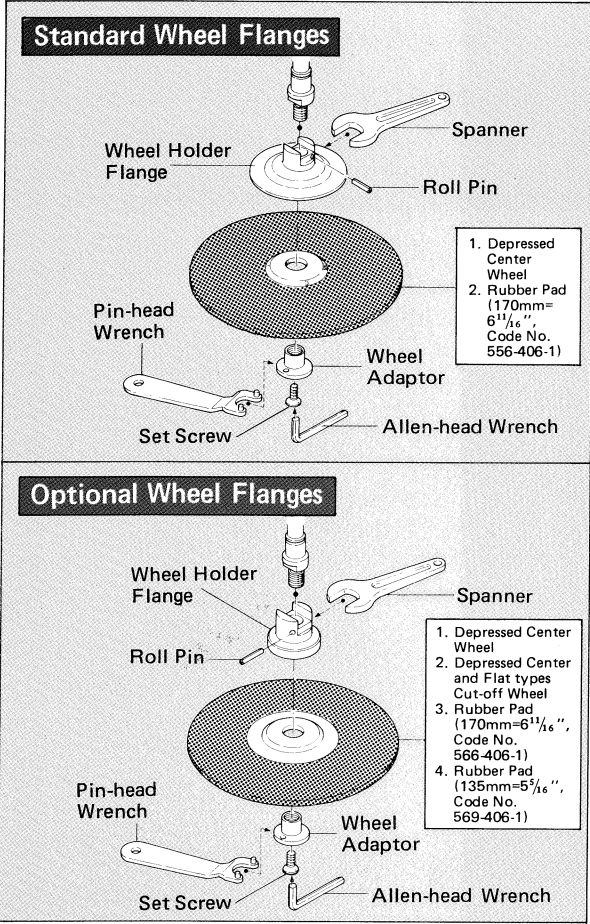


UVG-1500L-60P

Special model for sanding.

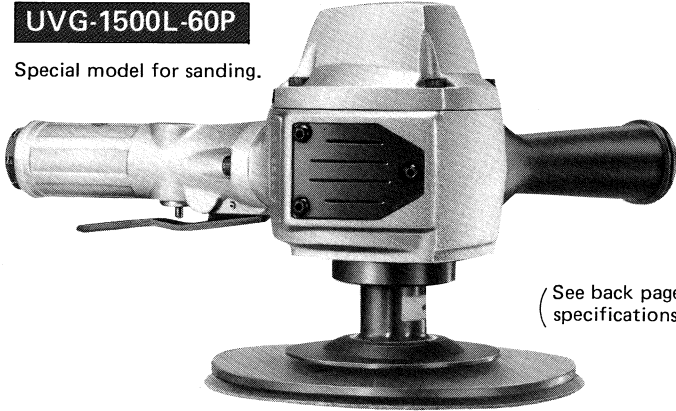


(See back page for specifications.)


HOW TO MOUNT WHEELS

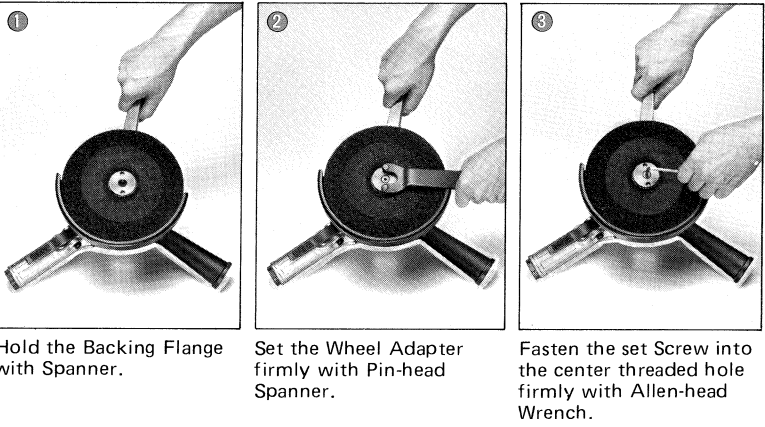

RECOMMENDED AIR PIPING SYSTEM

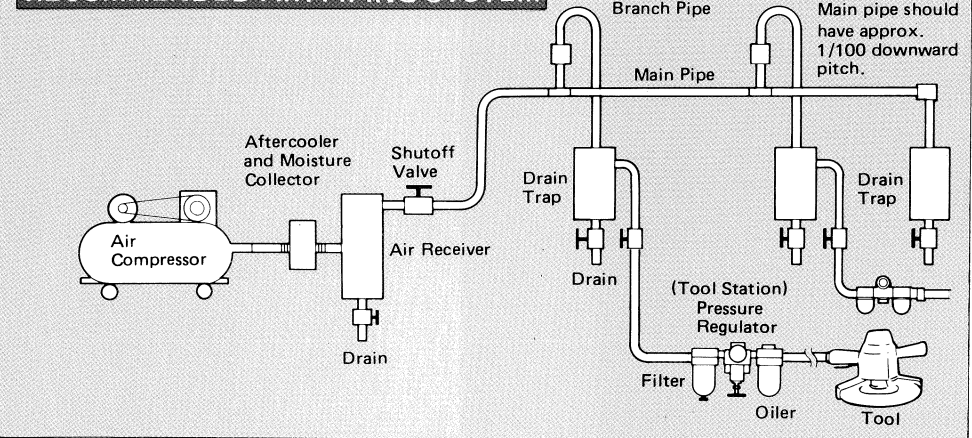

SILENCER(OPTION)

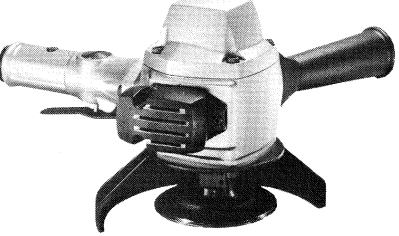

IMPORTANT!!

- ★ **Air Pressure:**— 6 kg/cm² (85 psi) Air Pressure is recommended for the most efficient performance. Too high air pressure will cause damage.
- ★ **Lubrication:**— **For Air Motor** — Supply turbine Oil properly before and after operation. (For example MOBIL TURBINE OIL #32, SHELL TURBIN OIL #32 or equivalent.)
For Bearings — Supply recommended high quality Grease properly (for examples, SHELL ALVANIA NO.2, MOBILPLEX 2, or equivalents) once every three months and when the tool is overhauled. Over-greasing will cause dull motion or heating.
- ★ **Dry & Clean Air:**— Drain daily, and install filter at or near the take-off point to prevent trouble from foreign matter.
- ★ **Air Hose & Joints:**— Use Air Hose (the shorter, the better), Joints and other fittings of good condition and of proper size to avoid pressure drop.
- ★ **Regular Overhaul:**— At least once every three months regular or periodical overhaul by a competent person is needed for best performance and trouble-less operation.
- ★ **Genuine Parts:**— Use only URYU's genuine spare parts for replacement.


Distributed by

Printed in Japan

UVG SERIES
HIGH POWER-TO-WEIGHT
VERTICAL GRINDERS



PATENT. P.

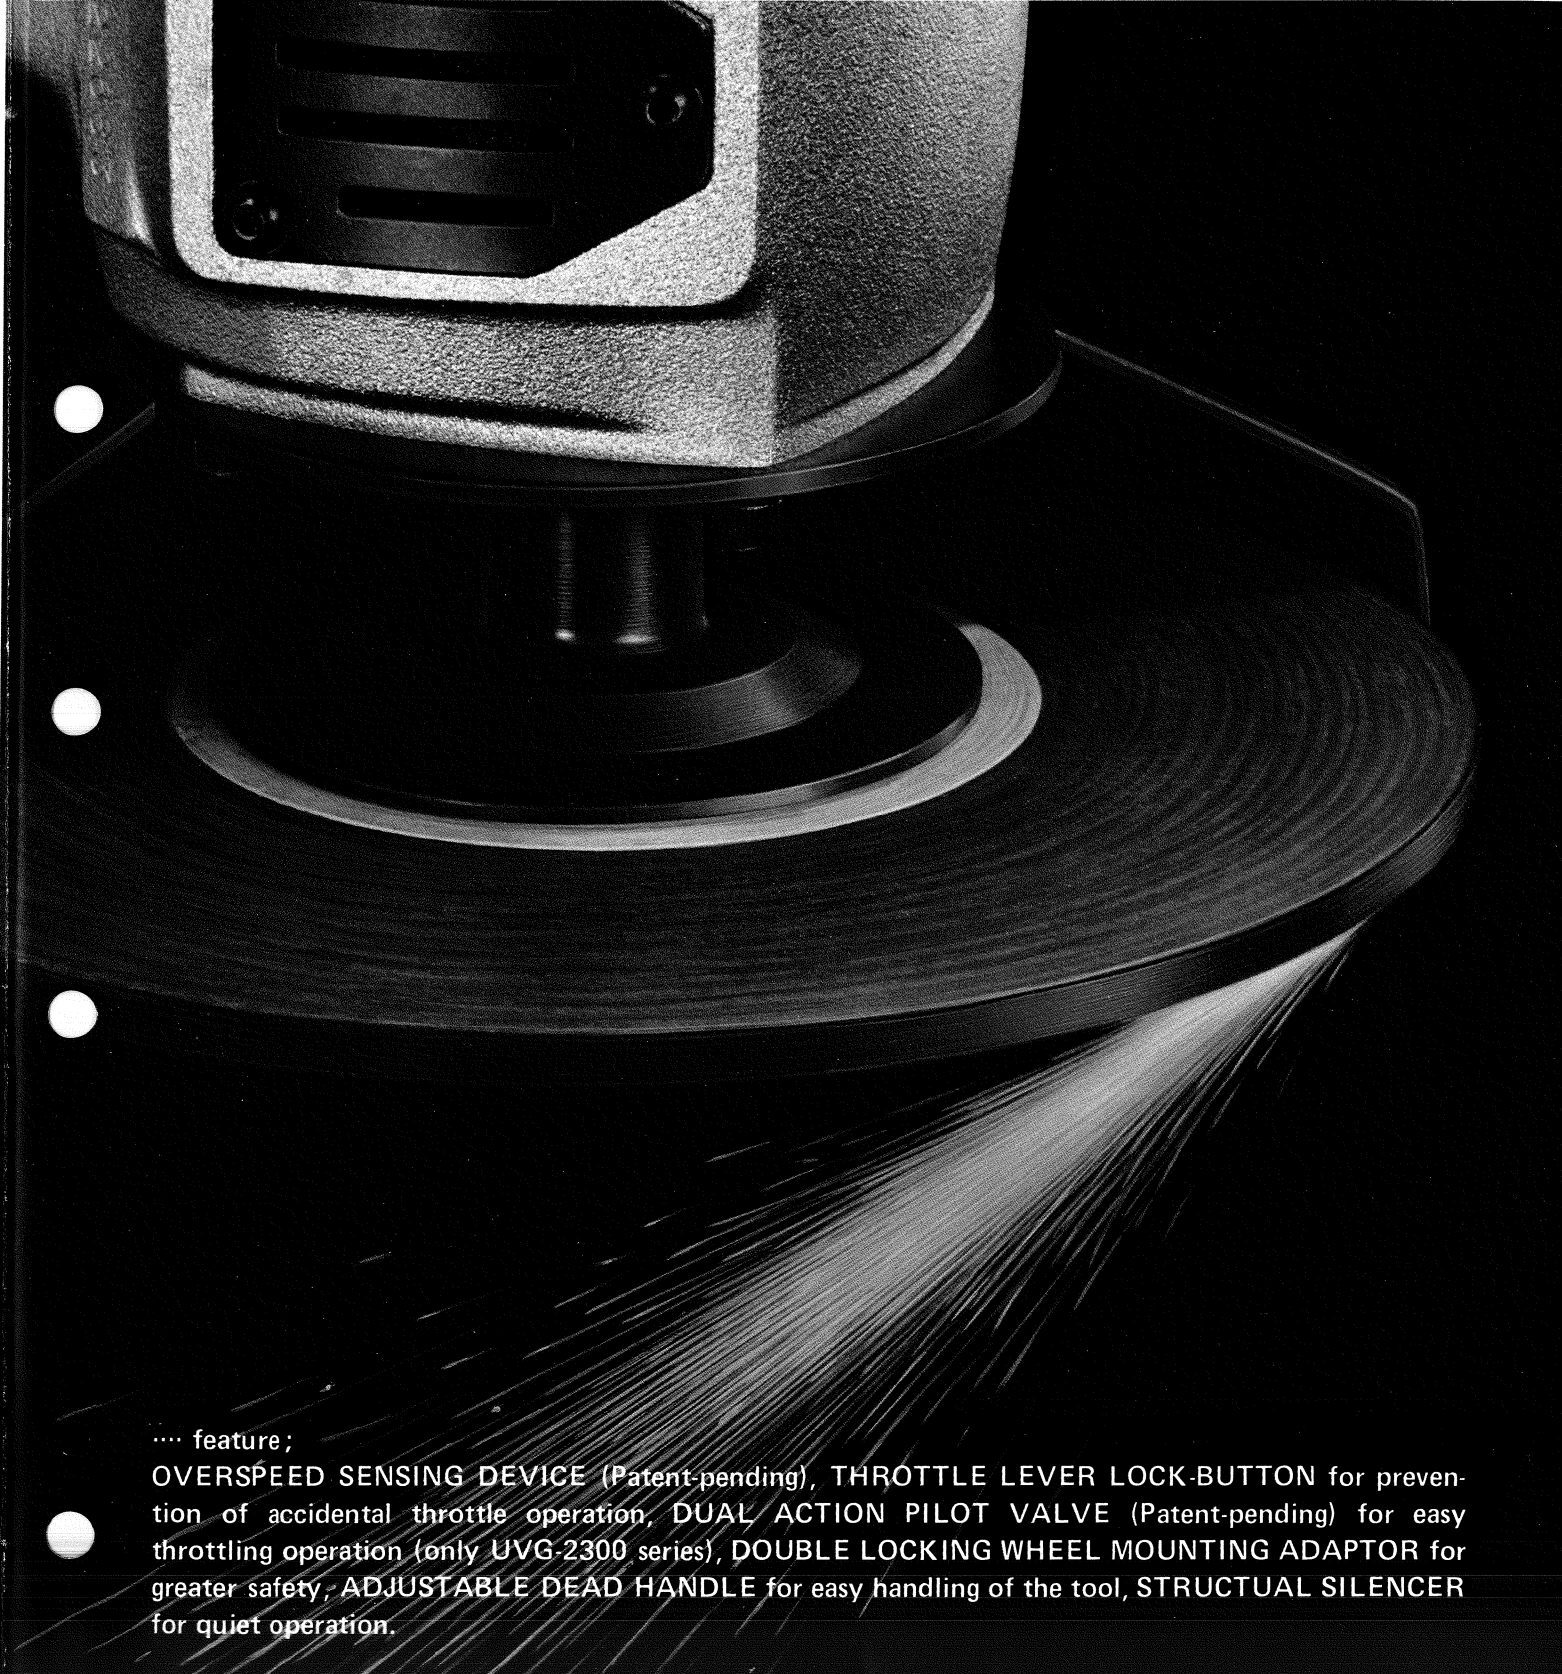

.... feature ;
OVERSPEED SENSING DEVICE (Patent-pending), THROTTLE LEVER LOCK-BUTTON for prevention of accidental throttle operation, DUAL ACTION PILOT VALVE (Patent-pending) for easy throttling operation (only UVG-2300 series), DOUBLE LOCKING WHEEL MOUNTING ADAPTOR for greater safety, ADJUSTABLE DEAD HANDLE for easy handling of the tool, STRUCTUAL SILENCER for quiet operation.

URYU SEISAKU, LTD.
Osaka, Japan

Claims must be filed only with distributors within ten (10) days from delivery.

OKA-299-95-08-08-2007