
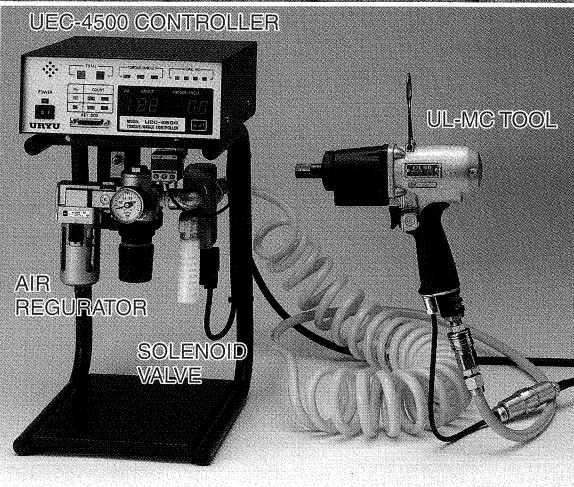


Ultra-Light Weight

(6 MODELS FROM 6~130Nm)

UL-MC SERIES OIL-PULSE WRENCHES

We have added the new range of Super Intelec System in combination with UL-series Air Motor and non-contact magnetostrictive type transducer. The main object to develop UL-MC series is to reduce the weight and length of the tool for operator's comfort by removing the built-in shut-off valve mechanism. As a result, we could succeed in reducing the weight by approx. 20% and the length by approx. 20% in comparison with conventional ALPHA-MC series tools.

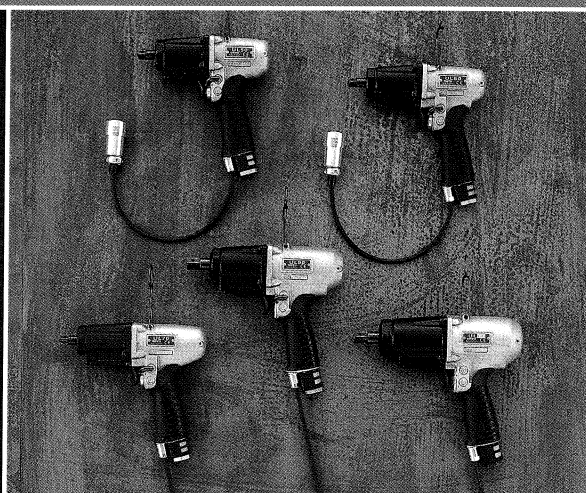

SPECIFICATIONS

(Subject to change without notice)

Model	Capacity (Nominal Bolt Size)		Torque Range				Free Speed (Approx.) r.p.m		Overall Length (about)		Weight less Socket or Bit (about)		from Center to Outside (about)		Sq. Drive or Hex. Size		Average Air consumption		Noise Level	Vibra- tion Level
			0.5Mpa		0.6Mpa															
	mm	in	Nm	ft-lbs	Nm	ft-lbs	0.5Mpa	0.6Mpa	mm	in	Kg	lb	mm	in	mm	in	m³/min	ft³/min	dB(A)	m/sec²
UL40MC	6	No.10	6~11	4.3~7.9	7.5~15	5.6~11.1	6200	6500	170.0	6 11/16	1.10	2.42	26.0	1 1/32	9.5	3/8	0.20	7.0	78	1.2
UL40DMC	6	No.10	6~11	4.3~7.9	7.5~15	5.6~11.1	6200	6500	169.5	6 43/64	1.10	2.42	26.0	1 1/32	6.35	1/4	0.20	7.0	78	1.2
UL50MC	6	No.10	12~25	8.9~18.5	20~35	14.8~25.9	6300	6700	175.0	6 57/64	1.10	2.42	26.0	1 1/32	9.5	3/8	0.25	8.8	78	1.5
UL60MC	8	5/16	20~40	14.8~29.6	30~50	22.2~37.0	6100	6600	175.0	6 57/64	1.14	2.51	26.0	1 1/32	9.5	3/8	0.40	14.0	80	1.5
UL70MC	8~10	5/16~3/8	25~50	18.5~37.0	36~65	26.6~48.1	5300	5700	187.0	7 23/64	1.24	2.73	26.0	1 1/32	9.5	3/8	0.45	15.8	80	1.5
UL90MC	10~12	3/8~1/2	40~80	29.6~59.2	55~100	40.7~74.0	5200	5500	203.0	7 63/64	1.70	3.74	28.0	1 3/16	12.7	1/2	0.58	20.3	82	2.0
UL100MC	12	1/2	85~110	62.9~81.4	70~130	51.8~96.2	4900	5200	215.0	8 15/32	2.05	4.51	30.0	1 27/64	12.7	1/2	0.55	19.3	82	2.0



URYU SEISAKU, LTD.
Osaka, Japan

OKA-503-05-04-2001