


3/8" (9.5mm) Drive IMPACT WRENCHES (Reversible)

These light in weight, rugged-constructed and powerful Impact Wrenches offer fast and smooth operation for bolt and nut fastening and loosening work. Well-balanced dual-hammer impacting mechanism produces fast rundown and provides maximum tool life. Three types are available for each series: pistol type is suited to general application, straight type to bench work and angle type for hard-to-reach places. Every standard model is convertible to the rear exhaust handle type for silent operation.



LIGHTWEIGHT

By employing Cylinder and End Plates of aluminum alloy, these tools are lighter in weight by approx. 20% than ordinary models.

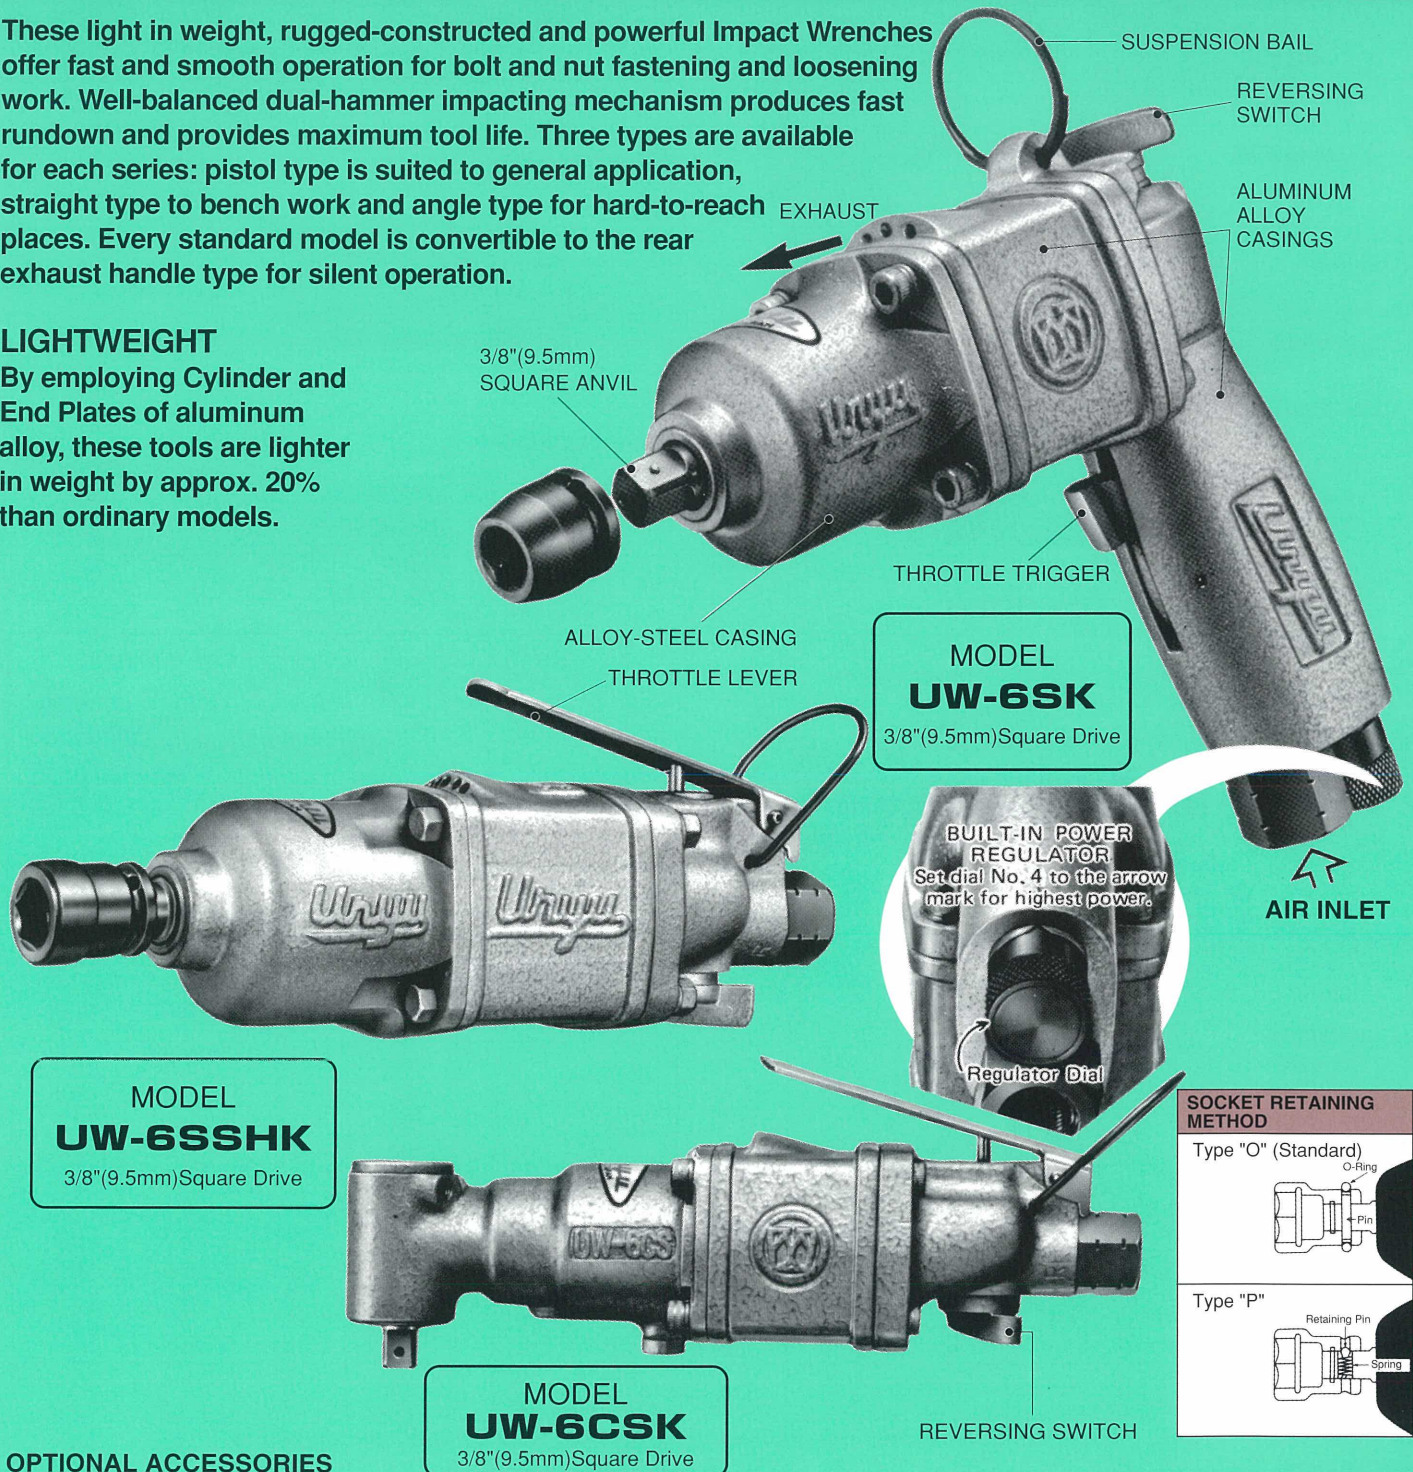


OPTIONAL ACCESSORIES


Driver Chuck for
1/4" Hex. bit
Code No.907-000-0



Universal Joint
Code No.906-000-0






Air Regulator
Code No.932-110-0




URYU SEISAKU, LTD. Oct 2012
Osaka, Japan

OKA-203-12-08-06-2005

URYU IMPACT WRENCHES

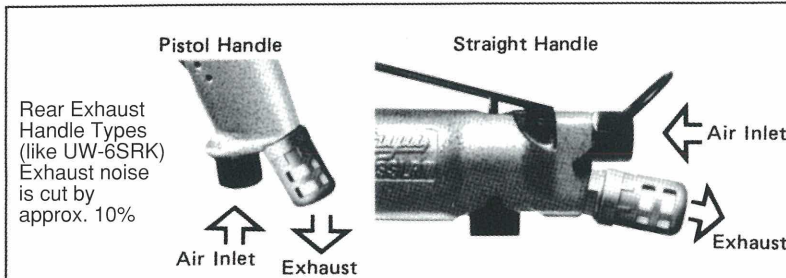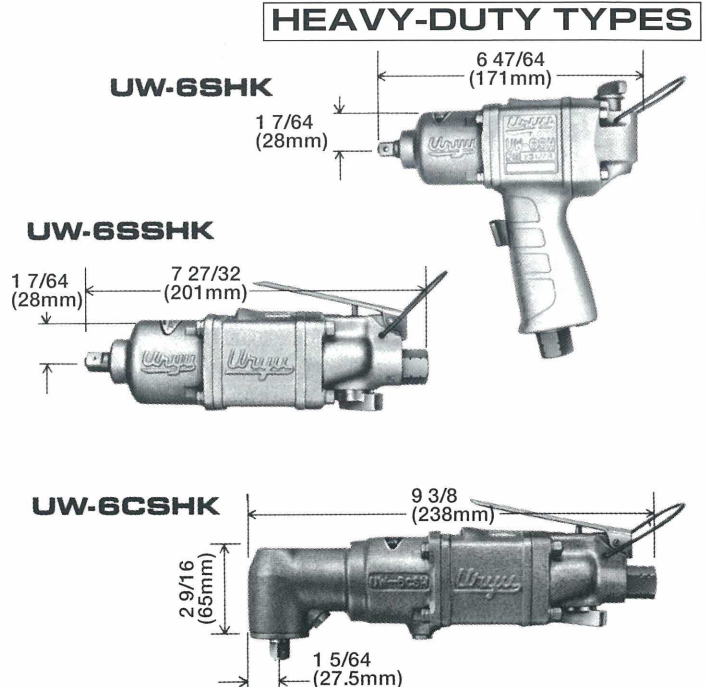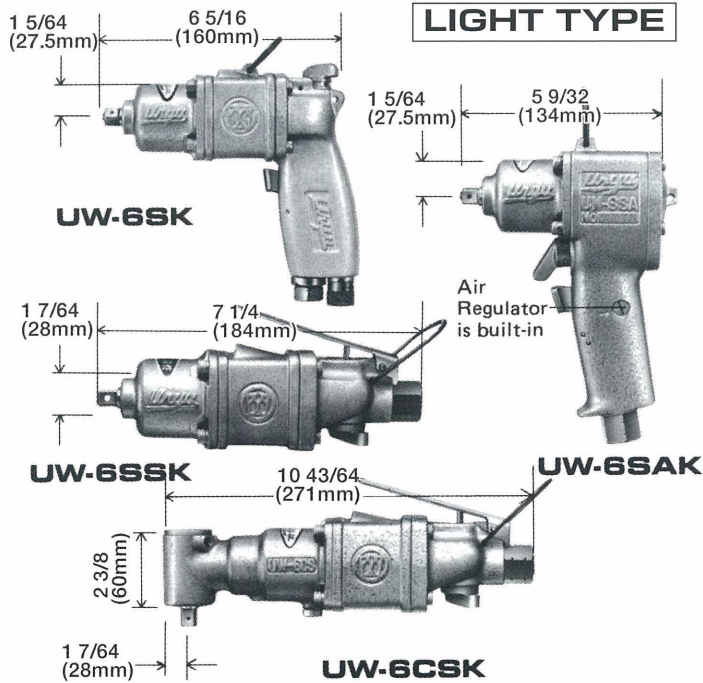

Quick-change Driver Anvil (for 1/4" Hex. bit) is available for the pistol and straight handle types.)

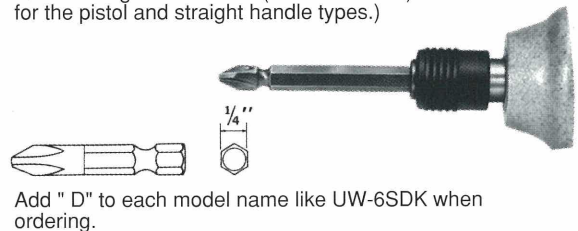

SPECIFICATIONS (Subject to change without notice.)

※The uncertainty in the sound levels is 3dB(A).

Model		Capacity (Bolt Size)		Free Speed(about)	Weight Less Socket(about)		Average Air Consumption(about)		Sound Pressure Level (L _W)	Sound Power Level (L _W)	Vibration Total Value (A _W)	Vibration Uncertainty (K)
		mm	in	rpm	kg	lb	m³/min.	ft³/min.	dB (A)	dB (A)	m/sec²	m/sec²
Standard	UW-6SAK	6	1/4	7,500	1.10	2.47	0.30	10.5	93	104	4.1	0.8
	UW-6SK	6	1/4	7,500	1.22	2.68	0.30	10.5	93	104	3.8	0.8
	UW-6SSK	6	1/4	7,500	0.97	2.13	0.30	10.5	91	102	5.0	0.9
	UW-6CSK	6	1/4	7,500	1.42	3.12	0.30	10.5	94	105	18.2	2.1
	UW-6SHK	8	5/16	7,500	1.41	3.10	0.35	12.4	92	103	4.2	0.8
	UW-6SSHK	8	5/16	7,500	1.21	2.66	0.35	12.4	92	103	6.9	1.1
	UW-6CSHK	8	5/16	7,500	1.71	3.76	0.35	12.4	94	105	27.0	3.0
Rear Exhaust	UW-6SARK	6	1/4	7,500	1.10	2.47	0.30	10.5	92	103	3.9	0.8
	UW-6SRK	6	1/4	7,500	0.97	2.13	0.30	10.5	92	103	3.9	0.8
	UW-6SSRK	6	1/4	7,500	0.97	2.13	0.30	10.5	90	101	5.0	0.9
	UW-6CSRK	6	1/4	7,300	1.42	3.12	0.30	10.5	94	105	18.0	2.1
	UW-6SHBRK	8	5/16	7,300	1.36	2.99	0.35	12.4	92	103	4.3	0.8
	UW-6SSHRK	8	5/16	7,300	1.26	2.77	0.35	12.4	91	102	6.7	1.1
	UW-6CSHRK	8	5/16	7,300	1.71	3.76	0.30	12.4	94	105	27.0	3.0

Air Pressure : 0.6MPa (85psi) Drive Shank : 9.5mm (3/8") Air Inlet Thread (Pipe Tap) : N.P.T. 1/4 Air Hose Size : 9.5mm (3/8")

IMPORTANT!!

- ★ **Air Pressure** :—Air Pressure of 0.6MPa(85psi) is recommended for the most efficient performance. Too high air pressure will shorten tool's life. Adjust air current by Air Regulator for favorable influence on tool's life.
- ★ **Lubrication** :—For Air Motor-Supply Turbine Oil properly through Air Inlet or Line Oiler every before and after operation. (for example, MOBIL TURBINE OIL #32, SHELL TURBINE OIL #32, and or equivalents.)
- ★ **For Impacting Part**—Supply recommended high quality Grease properly (for examples, SHELL Alvania EP R2, NIPPON Sharples Grease, or equivalents.) once every three months and when the tool is overhauled. Over-greasing will cause dull motion or heating.
- ★ **Dry & Clean Air** :—Drain daily, and install Filter at or near the take-off point to prevent trouble from foreign matter.
- ★ **Air Hose & Joints** :—Use Air Hose (the shorter, the better), Joints and other fittings of good condition and of proper size to avoid pressure drop.
- ★ **Sockets** :—Do not use Sockets which are worn at female square where Anvil fits in.
- ★ **Anvil & Hammer** :—Replace Anvil and Hammer together when either of them is found worn.
- ★ **Genuine Parts** :—Use only URYU's genuine spare parts for replacement.
- ★ **Regular Overhaul** :—At least every three months regular or periodical overhaul by a competent person is needed for best performance and trouble-less operation.

Distributed by

Printed in Japan

URYU SEISAKU, LTD.

Claims must be filed only with distributors within ten(10)days from delivery.