
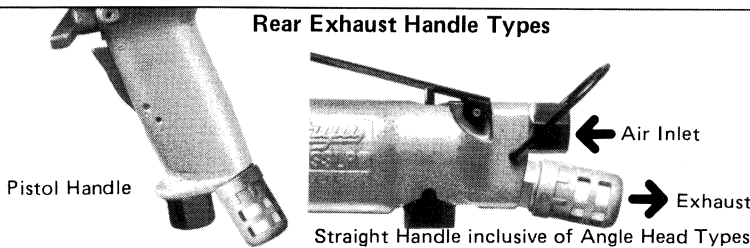
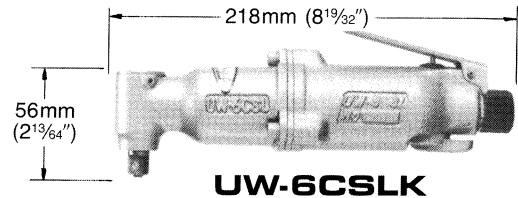
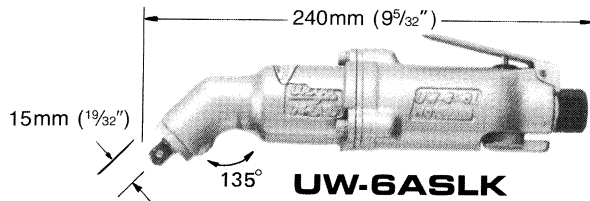
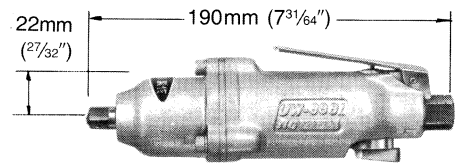


URYU IMPACT WRENCHES

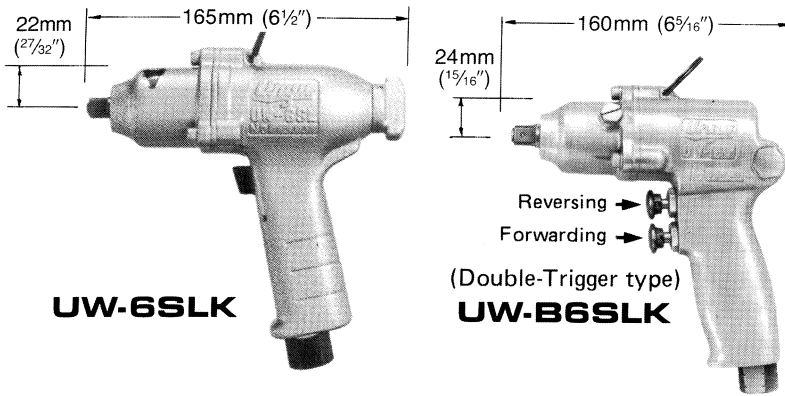

Quick-change Anvil for UW-6SLDK, UW-6SLRDK, UW-6SSLDK, UW-6SSLRDK and UW-B6SLDK (1/4" Hex. Bits are used.)

Bit Shank

Pull up the spring-loaded Sleeve to release the Bits for exchange.

SPECIFICATIONS (Subject to change without notice.)

Model	Capacity Bolt Size		Free Speed	Overall Length		Weight less Socket		From Center to Outside		Drive Shank (Sq. or Hex.)		Air Inlet Thread	Air Hose Size		Sound Level	Vibration Level
	mm	inch		mm	inch	kg	lb	mm	inch	mm	inch		mm	inch		
UW-6SLK	M6	1/4	8,500	165	6 1/2	0.97	2.13	22	27/32	9.5 Sq.	3/8	NPT.1/4	9.5	3/8	92	5.6
UW-B6SLK	M6	1/4	8,500	160	6 5/16	0.97	2.13	24	15/16	9.5 Sq.	3/8	NPT.1/4	9.5	3/8	92	5.6
UW-6SLDK	M6	1/4	8,500	165	6 1/2	0.97	2.13	22	27/32	6.35 Hex	1/4	NPT.1/4	9.5	3/8	92	5.6
UW-B6SLDK	M6	1/4	8,500	170	6 45/64	1.00	2.20	24	15/16	6.35 Hex	1/4	NPT.1/4	9.5	3/8	92	5.6
UW-6SLRK	M6	1/4	8,500	169	6 21/32	0.97	2.13	22	27/32	9.5 Sq.	3/8	NPT.1/4	9.5	3/8	91	5.6
UW-6SLRDK	M6	1/4	8,500	169	6 21/32	0.97	2.13	22	27/32	6.35 Hex	1/4	NPT.1/4	9.5	3/8	91	5.6
UW-6SSLK	M6	1/4	8,500	190	7 31/64	0.87	1.91	22	27/32	9.5 Sq.	3/8	NPT.1/4	9.5	3/8	91	10.0
UW-6SSLDK	M6	1/4	8,500	202	7 61/64	0.90	1.98	22	27/32	6.35 Hex	1/4	NPT.1/4	9.5	3/8	91	10.0
UW-6SSLRK	M6	1/4	8,500	212	8 11/32	0.87	1.91	21	53/64	9.5 Sq.	3/8	NPT.1/4	9.5	3/8	90	10.0
UW-6SSLRDK	M6	1/4	8,500	227	8 15/16	0.90	1.98	21	53/64	6.35 Hex	1/4	NPT.1/4	9.5	3/8	90	10.0
UW-6CSLK	M6	1/4	8,000	218	8 19/32	1.17	2.57	—	—	9.5 Sq.	3/8	NPT.1/4	9.5	3/8	93	31.6
UW-6ASLK	M6	1/4	6,500	240	9 5/32	1.14	2.50	—	—	9.5 Sq.	3/8	NPT.1/4	9.5	3/8	92	31.6
UW-6ASLRK	M6	1/4	8,000	238	8 11/32	1.17	2.57	—	—	9.5 Sq.	3/8	NPT.1/4	9.5	3/8	93	31.6
UW-6ASLRK	M6	1/4	6,500	260	10 15/64	1.14	2.50	—	—	9.5 Sq.	3/8	NPT.1/4	9.5	3/8	92	31.6

Accessories : Socket, Air Hose Nipple * Average Air Consumption (about) 0.3m³/min (10.7ft³/min) * Recommend Air Pressure : 0.6MPa (85psi)
 * Sound level measured to ISO 15744 * Vibration level measured to ISO 8662-7

IMPORTANT!!

- | | |
|---|---|
| <p>Air Pressure → Air Pressure of 0.6MPa (85 psi) is recommended for the most efficient performance. Too high air pressure will shorten tool's life.</p> <p>Lubrication → For Air Motor— Supply turbine Oil properly through Air Inlet or Line Oiler every before and after operation. (for examples, MOBIL TURBINE OIL #32 SHELL TURBINE OIL #32, and or equivalents.)</p> <p>For Impacting Part— Supply recommended high quality Grease properly (for examples, SHELL Albania EP R2, NIPPON Sharples Grease, ESSO Beacon Q2, or equivalents.) once every three months and when the tool is overhauled. Over-greasing will cause dull motion or heating.</p> <p>Dry & Clean Air → Drain daily, and install Filter at or near the take-off point to prevent trouble from foreign matter.</p> | <p>Air Hose & Joints → Use Air Hose (the shorter, the better), Joints and other fittings of good condition and of proper size to avoid pressure drop.</p> <p>Sockets → Do not use Sockets which are worn at female square where Anvil fits in.</p> <p>Anvil & Hammer → Replace Anvil and Hammer together when either of them is found worn.</p> <p>Genuine Parts → Use only URYU's genuine spare parts for replacement.</p> <p>Regular Overhaul → At least once every three months regular or periodical overhaul by a competent person is needed for best performance and trouble-less operation.</p> |
|---|---|

Distributed by :

Printed in Japan

URYU SEISAKU, LTD.

Claims must be filed only with distributors within ten(10)days from delivery.