


SINGLE SPEED NUTRUNNER MOTORS

LIGHTWEIGHT TYPE

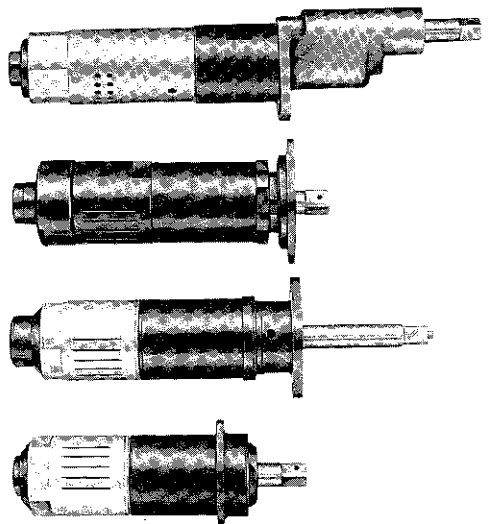

UNR-90

UNR-90N


UNR-90K

UNR-90F


Lightweight type nutrunner motors are about half in weight when compared with standard type motors in same capacity. Assembled with lightweight ones, the light and compact multiple nutrunners are very convenient in operation and yet greatly reduce operator's fatigue.

The maximum air pressure is recommended to be about 5 kg/cm² (71 psi) for the optimum performance of the lightweight type.

STRAIGHT TYPE NON-REVERSIBLE

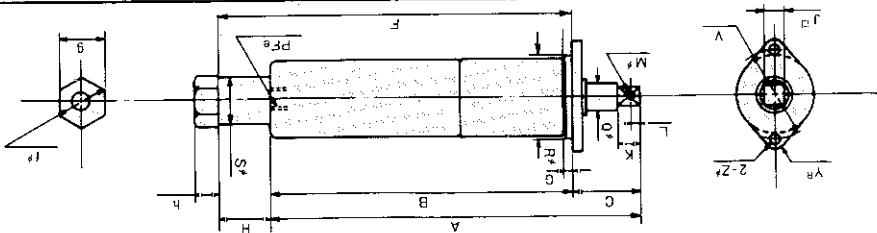

MODEL	A	B	C	F	G	H	J	K	L	M	Q	R	S	V	Y	Z	e	f	g	h
UNR-50L	163	128	35	148	10	20	9.5	12.0	5.0	3.2	12	40	16	50	5	5.3	1	22	20	15
UNR-50H	163	128	35	148	10	20	9.5	12.0	5.0	3.2	12	40	16	50	5	5.3	1	22	20	15
UNR-60L	170	135	35	155	10	20	9.5	12.0	5.0	3.2	12	40	16	50	5	5.3	1	22	20	15
UNR-60H	170	135	35	155	10	20	9.5	12.0	5.0	3.2	12	40	16	50	5	5.3	1	22	20	15
UNR-70L	187	152	35	174	10	22	9.5	12.0	5.0	3.2	12	45	16	55	6	6.3	3	28	25	17
UNR-70H	187	152	35	174	10	22	9.5	12.0	5.0	3.2	12	45	16	55	6	6.3	3	28	25	17
UNR-80L	194	158	36	180	10	22	12.7	16.5	8.0	3.5	15	50	16	60	5	6.3	3	28	25	17
UNR-80H	194	158	36	180	10	22	12.7	16.5	8.0	3.5	15	50	16	60	5	6.3	3	28	25	17
UNR-100L	228	151	78	176	10	25	15.88	20	8	4.5	20	70	24	84	7.5	8.5	4	34	30	18
UNR-100H	228	151	77	176	10	25	15.88	20	8	4.5	20	70	24	84	7.5	8.5	4	34	30	18
UNR-110H	262	175	87	203	10	28	19.00	30	10	5.2	25	82	31	96	7.5	8.85	4	40	35	28

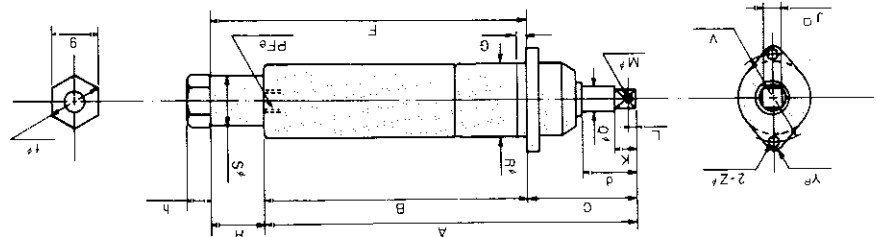

MODEL	A	B	C	F	G	H	J	K	L	M	Q	R	S	V	Y	Z	e	f	g	h
UNR-90L	235	162	73	187	10	25	15.88	20	8	4.5	20	66	24	84	7.5	8.5	4	34	30	18
UNR-90H	235	162	73	187	10	25	15.88	20	8	4.5	20	66	24	84	7.5	8.5	4	34	30	18
UNR-100L	228	151	78	176	10	25	15.88	20	8	4.5	20	70	24	84	7.5	8.5	4	34	30	18
UNR-100H	228	151	77	176	10	25	15.88	20	8	4.5	20	70	24	84	7.5	8.5	4	34	30	18
UNR-110H	262	175	87	203	10	28	19.00	30	10	5.2	25	82	31	96	7.5	8.85	4	40	35	28