

PB-SERIES CHIPPING HAMMERS



EXPLODED VIEW


Handle Assembly

Code No.727-001-5


Components

(#1, 2, 3, 4, 5, 6, 19, 20, 21, 22, 23)

PB-30

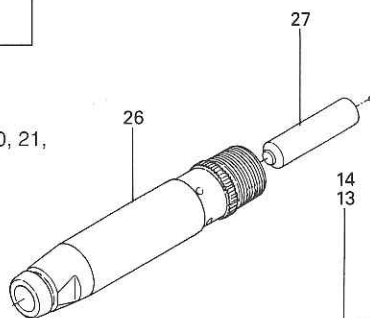

PB-20

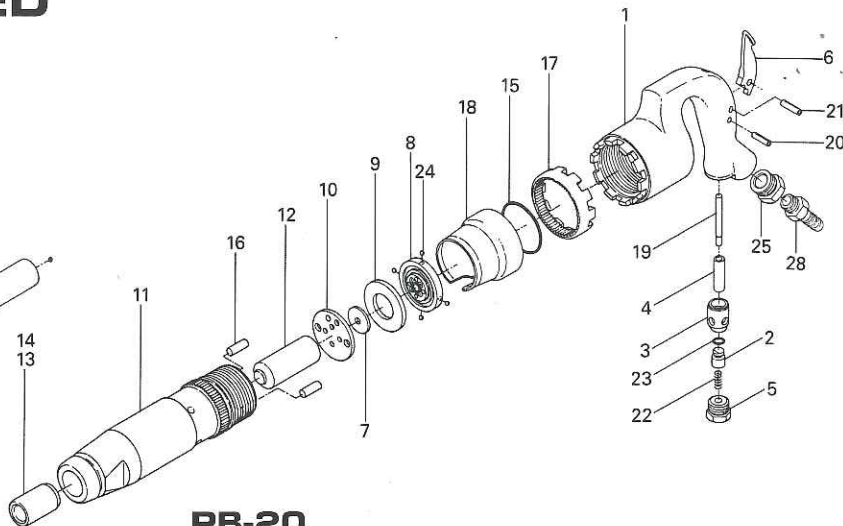

PARTS LIST

Handle Assembly Components are marked with "○".

Index No.	Code No.	Parts Name	Quantity	Index No.	Code No.	Parts Name	Quantity	Index No.	Code No.	Parts Name	Quantity
# 1	727-010-5	○ Handle	1	#11	727-286-5	Cylinder(PB-20Type)	1	#21	973-345-0	○ Roll Pin (6×20)	1
# 2	727-100-5	○ Valve	1	#12	727-546-5	Piston (PB-20Type)	1	#22	976-277-0	○ Spring (6.7×34)	1
# 3	727-102-5	○ Valve Bushing	1	#13	727-567-5	Bushing (R)	1	#23	990-005-0	○ O-Ring (P7)	1
# 4	727-103-5	○ Valve Rod Bushing	1	#14	778-567-5	Bushing (H)	1	#24	981-004-0	Ball (3/16)	4
# 5	727-108-5	○ Valve Plug	1	#15	990-046-0	O-Ring (P50)	1	#25	727-091-5	Air Inlet Bushing	1
# 6	727-107-5	○ Throttle Trigger	1	#16	727-761-5	Notch Pin	2	#26	728-286-5	Cylinder (PB-30Type)	1
# 7	727-195-5	Main Valve	1	#17	727-562-5	Lock Sleeve	1	#27	728-546-5	Piston (PB-30Type)	1
# 8	727-198-5	Rear Valve Seat	1	#18	727-782-5	Exhaust Deflector	1	Accessories			
# 9	727-199-5	Medium Valve Seat	1	#19	727-104-5	○ Valve Rod	1	#28	940-124-0	Air Hose Nipple (NPT3/8x1/2-7)	1
#10	727-200-5	Front Valve Seat	1	#20	973-323-0	○ Roll Pin (5×25)	1				


For further information, please contact at any time your nearest URYU distributor.

SPECIFICATIONS

RECOMMENDED AIR PRESSURE : 0.6MPa(85psi)

Model	Blows per minute (about)	Overall Length (about)		Weight (about)		Piston (Dia.×Stroke)		Air Inlet Thread (Pipe Tap)	Air Hose Size		Average Air Consumption (about)	
		in	mm	lb	kg	in	mm		in	mm	ft³/min	m³/min
PB-20(R)(H)	1,900	13 25/32	350	14.5	6.6	1 1/8×3	28.5×76	N.P.T. 3/8	1/2	12.7	2.8	0.8
PB-30(R)(H)	1,500	15 5/8	397	15.6	7.1	1 1/8×4	28.5×102	N.P.T. 3/8	1/2	12.7	2.8	0.8

Chisels (Optional Accessories)

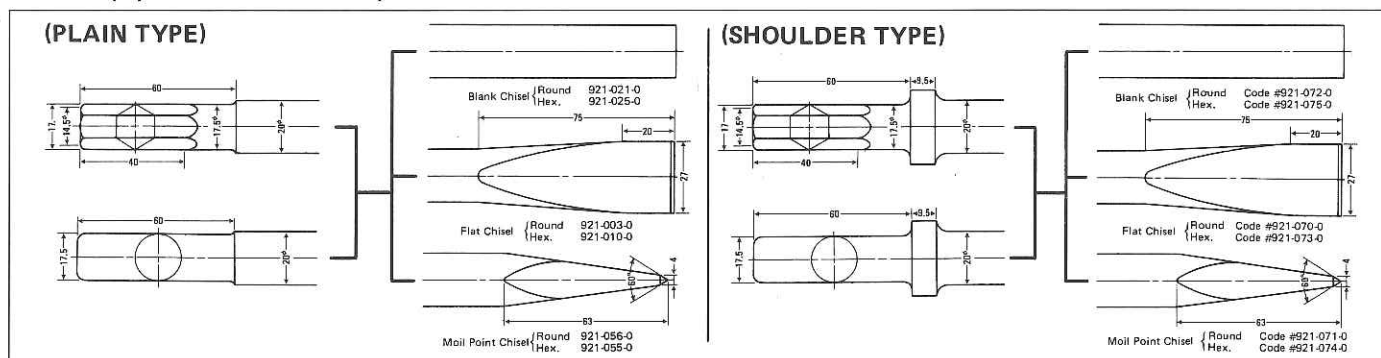

Distributed by

Printed in Japan

URYU SEISAKU, LTD.

Claims must be filed only with distributors within ten(10)days from delivery.