



URYU AIR DIE GRINDERS

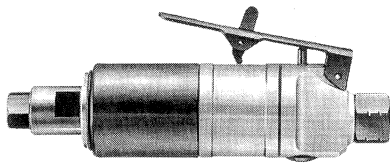


UG-25NA
(Lever-type Throttle)


COLLET CHUCK for UG-25 series & UG-50S-200A




Code No.	Size
923-001-0	3 mm
923-003-0	6 mm (Standard)
923-005-0	1/8 "
923-006-0	1/4 "
923-008-0	8 mm



UG-25NSA
(Roll-type Throttle)

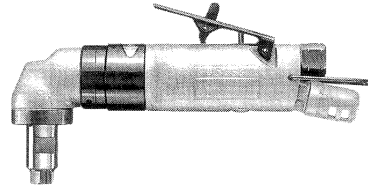


UG-50S-200A
(Angle Type)

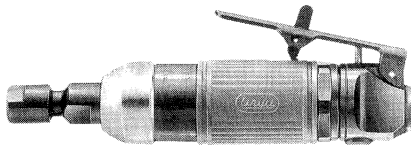


UG-38N
(Lever-type Throttle)


COLLET CHUCK ASSEMBLY for UG-38N series



Code No.	Size
923-510-0	3 mm
923-512-0	6 mm (Standard)
923-515-0	1/8 "
923-516-0	1/4 "
923-518-0	8 mm




UG-38NS
(Roll-type Throttle)

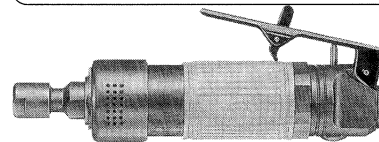

UG-38NA

(Silent Type [75dB(A), 1M from tool])

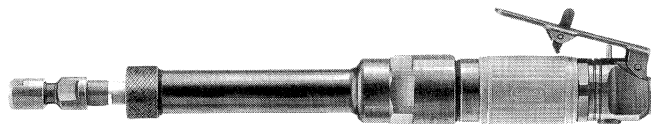


UG-38NL
(Extended, Lever Throttle Type)



UG-38NSL
(Extended, Roll Throttle Type)

REAR EXHAUST Types Recommended for the jobs which hate blown up dust by exhaust.

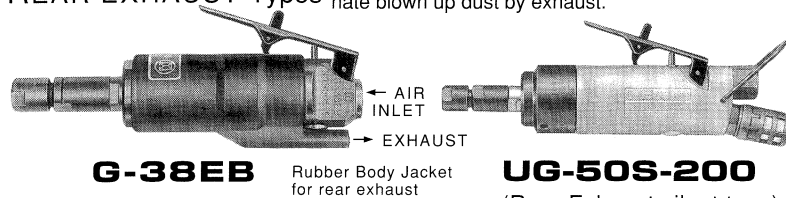


G-38EB

Rubber Body Jacket for rear exhaust

UG-50S-200

(Rear Exhaust silent type)

COLLET CHUCK ASSEMBLY for UG-50S-200 & G-38EB



Code No.	Size
923-534-0	3 mm
923-535-0	6 mm (Standard)
923-536-0	1/4 "
923-539-0	1/8 "
923-542-0	8 mm

SPECIFICATION

MODEL	Collet Chuck Size	Max. Speed (about)	Overall Length (about)		Weight Less Wheel (about)		Air Inlet Thread	Air Hose Size		Average Air Consumption (about)		Air Pressure		Sound Level * 1	Sound Level * 2
		r.p.m	mm	in	kg	lb		mm	in	m ³ /min	ft ³ /min	MPa	psi	dB(A)	m/sec ²
UG-25NA	6mm, 1/4"	25,000	153	6 1/32	0.53	1.17	N.P.T 1/4	9.5	3/8	0.3	10.7	0.6	85	82	1.3
UG-25NSA	6mm, 1/4"	25,000	145	5 23/32	0.56	1.23	N.P.T 1/4	9.5	3/8	0.3	10.7	0.6	85	82	1.3
UG-38N	6mm, 1/4"	25,000	164	6 15/32	0.57	1.25	N.P.T 1/4	9.5	3/8	0.3	10.7	0.6	85	85	2.3
UG-38NS	6mm, 1/4"	25,000	168	6 5/8	0.60	1.32	N.P.T 1/4	9.5	3/8	0.3	10.7	0.6	85	85	2.3
UG-38NL	6mm, 1/4"	25,000	330	13	0.92	2.02	N.P.T 1/4	9.5	3/8	0.3	10.7	0.6	85	85	2.0
UG-38NSL	6mm, 1/4"	25,000	340	13 25/64	0.95	2.09	N.P.T 1/4	9.5	3/8	0.3	10.7	0.6	85	85	2.3
UG-38NA	6mm, 1/4"	20,000	165	6 1/2	0.65	1.43	N.P.T 1/4	9.5	3/8	0.4	14.0	0.6	85	75	1.0
UG-50S-200	6mm, 1/4"	20,000	198	7 51/64	0.60	1.32	N.P.T 1/4	9.5	3/8	0.4	14.0	0.6	85	73	2.3
UG-50S-200A	6mm, 1/4"	20,000	195	7 45/64	0.90	1.98	N.P.T 1/4	9.5	3/8	0.4	14.0	0.6	85	75	2.3
G-38EB	6mm, 1/4"	20,000	165	6 1/2	0.65	1.43	N.P.T 1/4	9.5	3/8	0.4	14.0	0.6	85	85	2.3

Standard Accessories: 6mm Collet Chuck, Air Hose Nipple, Tools for disassembly and Wheel mounting

* 1 Sound level measured to ISO 15744

* 2 Vibration level measured to ISO 8662-13

Distributed by:

URYU SEISAKU, LTD.

Claims must be filed only with distributors within ten(10)days from delivery.